
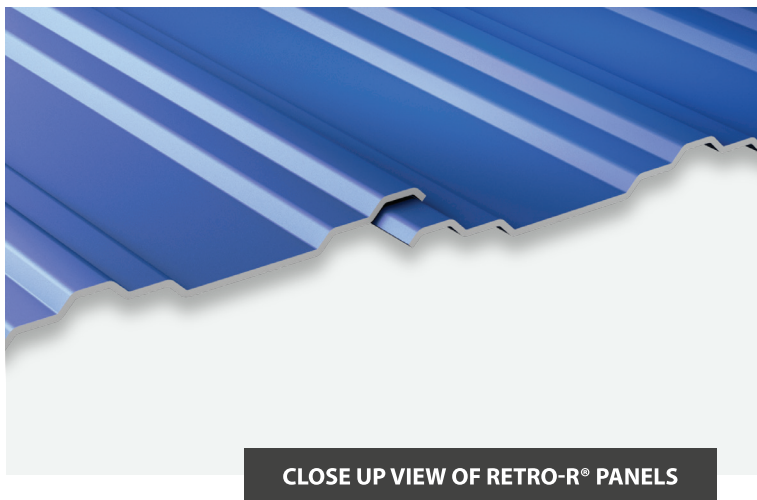


The Retro-R® panel eliminates the need for the disruptive roof and wall removal process entirely, as it is installed directly over an existing R panel. In addition to saving time in the project schedule and maintaining operations, this exposed fastening system requires fewer installation accessories, thus reducing cost and still providing a new roof and longer life. This panel has rib spacing 12" on center with a rib height of 1-1/16", and the minimum slope is 1/2:12. The Retro-R® panel has a Drip Stop membrane to prevent rust from the old roof or wall from transferring to the new panel.

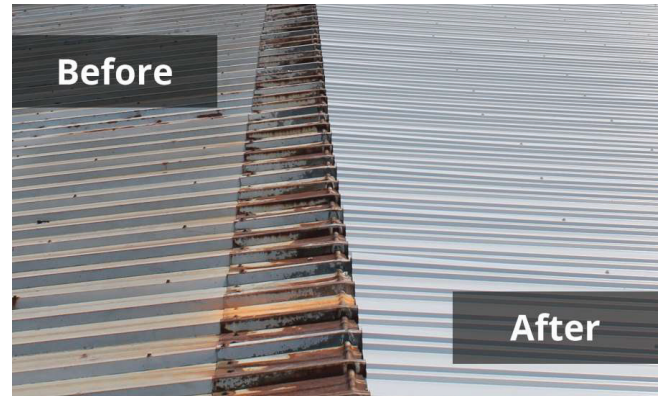

Product Specifications:

Coverage Width: 36"

Rib Height: 1-1/16"

Rib Spacing: 12" on center

Minimum Slope: 1/2:12

Materials and Thickness:
29 (standard); 26 GA Galvalume

Panel Attachment: Exposed Fastening System

Coatings: Galvalume Plus®, Signature® 200

Application:

- Functionality for re-roofs and walls
- Installed horizontally or vertically
- Ease of installation - applied directly over existing R-panel roof

Performance Standards:

Negative Wind Loads	AISI S100
Gravity Loads	AISI S100
Roof Performance - Florida Approval	ASTM E 1592

PANEL MEASUREMENTS

