


7.2 PANEL

ROOFING SYSTEMS




The 7.2 Panel offers versatility and functionality for roofs and walls. The symmetrical rib 7.2 Panel offers excellent spanning and cantilever capabilities, making it an excellent choice for a variety of wall and roof cladding. When a design requires a commercial or industrial exposed fastener panel, the 7.2 ribbed panel is an ideal choice.

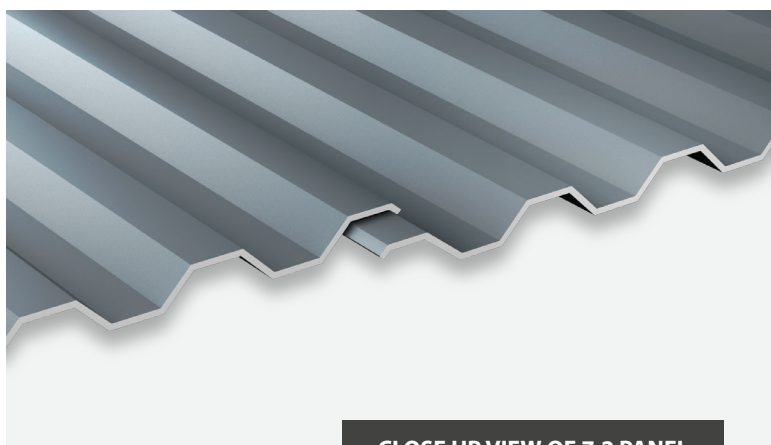

CLOSE UP VIEW OF 7.2 PANEL

PANEL MEASUREMENTS

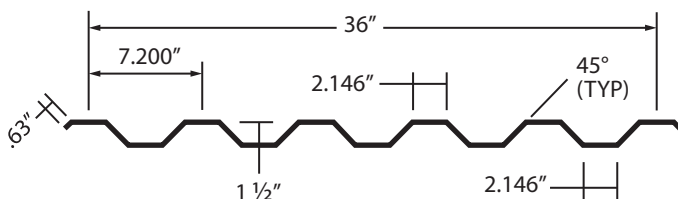

Product Specifications:

Coverage Width: 36"

Length: 5'-0" to 50'-0"

Rib Height: 1-1/2"

Rib Spacing: 7.2" on center

Minimum Slope: 1/2:12

Materials and Thickness:

24 (standard); 26, 22 (optional) GA Galvalume

Panel Attachment: Exposed Fastening System

Coatings: Signature® 200, Signature® 300,
Signature® 300 Metallic

Application:

- Installed horizontally or vertically
- Ease of installation - can be applied directly to solid decking or open framing
- Typical applications include roofs, walls, ceilings, fascias, mansards, equipment screens, and soffits

Performance Standards:

Ratings	UL 580, UL 790
External Fire	Class A
Internal Fire	Room assembly for UL 263
Impact Rating	UL 2218, Class 4
Carries Florida Approval	

CLAD WITH CONFIDENCE.

CALL NOW: 641.629.0878

SALES@WAARDMETALS.COM
WAARDMETALS.COM