



PBC panels can be used for both roof and wall applications. They are attached to a building structure with exposed fasteners. The PBC corrugated panel is often used in horizontal applications on walls and as decorative accents.

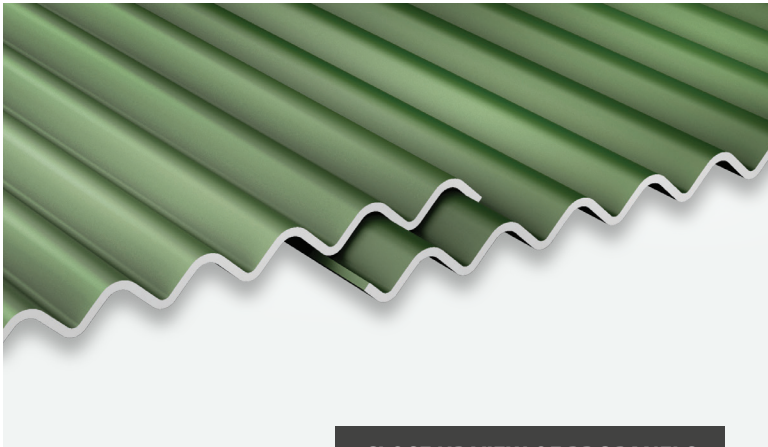

CLOSE UP VIEW OF PBC PANELS

### PANEL MEASUREMENTS



### Product Specifications:

**Coverage Width:** 32"

**Length:** 5'-0" to 50'-0"

**Rib Height:** 7/8"

**Rib Spacing:** 2 2/3" on center

**Minimum Slope:** 3:12

**Materials and Thickness:**

26 (standard); 24, 22 (optional) GA Galvalume

**Panel Attachment:** Exposed Fastening System

**Coatings:** Galvalume Plus®, Signature® 200,  
Signature® 300

### Application:

- Installed horizontally or vertically
- Ease of installation - can be applied directly to solid decking or open framing
- Typical applications include roofs, walls, ceilings, fascias, mansards, equipment screens, and soffits

### Performance Standards:

External Fire	UL 790
Negative Wind Loads	AISI S100
Gravity Loads	AISI S100