



The PBD panel is an exposed fastener panel system that can be used for roof and wall applications. The ribs in the PBD panel are symmetrical from top to bottom, which makes this panel ideal for accent walls and architectural details.

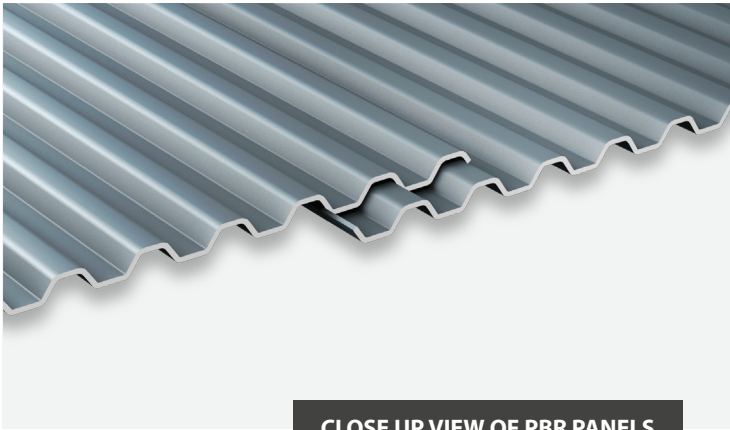

CLOSE UP VIEW OF PBR PANELS

PANEL MEASUREMENTS



Product Specifications:

Coverage Width: 32"

Length: 5'-0" to 50'-0"

Rib Height: $\frac{5}{8}$ "

Rib Spacing: 2 $\frac{2}{3}$ " on center

Minimum Slope: 3:12

Material and Thickness:

26 (standard); 24, 22 (optional) GA Galvalume

Panel Attachment: Exposed Fastening System

Coatings: Galvalume Plus[®], Signature[®] 200,
Signature[®] 300

Application:

- Installed horizontally or vertically
- Ease of installation - can be applied directly to solid decking or open framing
- Typical applications include roofs, walls, ceilings, fascias, mansards, equipment screens, and soffits

Performance Standards:

External Fire: UL 790, Class A

Internal Fire: Roof assembly for UL 263

Negative Wind Loads: AISI S100

Gravity Loads: AISI S100